



MuteMat[®] OSF 750-10

Product Data

Performance Data

MuteMat® OSF 750-10 Product Data

Description: MuteMat OSF 750-10 is our highly effective and slim resilient layer available for the reduction of impact noise in concrete constructions. It's density gives minimal compression leaving you a long lasting and effective solution that can receive a wide range of floor finishes.

Dimensions: 10mm x 1.3m x 5m
Roll Area: 6.5 m²
Roll Weight: 50 kg
Density: 750 kg/m³
Mass: 7.5 kg/m²
Recycled Content: 1.86 Recycled tyres per m² - 12.09 Recycled tyres per roll
92% Recycled - 100% Recyclable

Features and Benefits: Significantly reduces impact sounds.
Can be installed under finished flooring.
Does not deform, maintains efficiency long term.
Pre-fabricated recycled tire granule mat.
Low compression under heavy loads.
May be used in retrofit.



MuteMat® OSF 750-10 Performance Data

Treated Structure: Impact Sound Pressure Level according to ISO 717-2
Receiving Room Volume: 221m³

Floor Build-Up: MuteMat OSF 750-10
140mm Concrete Floor

Acoustic Performance: Reduction from MuteMat OSF 750-10: **ΔLw 23dB**


Performance will vary with different floor make-up.

Compression Loads: 10 kN/m² = 7% loss of thickness.
(Over 10 Years) 15 kN/m² = 10.6% loss of thickness.
20 kN/m² = 14.3% loss of thickness.

Thermal Performance: Thermal Conductivity = 0.113 W/mK
Thermal Resistance = 0.094 m²K/W
Temperature Stability = -35°C to +100°C.

| Hz | ½ Octave |
|------|----------|
| 100 | 1.7 |
| 125 | 1 |
| 160 | 2.9 |
| 200 | 6.7 |
| 250 | 11.3 |
| 315 | 13.7 |
| 400 | 20.7 |
| 500 | 34.9 |
| 630 | 37.7 |
| 800 | 41.6 |
| 1000 | 51.7 |
| 1250 | 54.5 |
| 1600 | 55.5 |
| 2000 | 57.7 |
| 2500 | 58.8 |
| 3150 | 61.1 |
| 4000 | 60.6 |
| 5000 | 61.2 |

Acoustic Test Report
MuteMat OSF 750-10

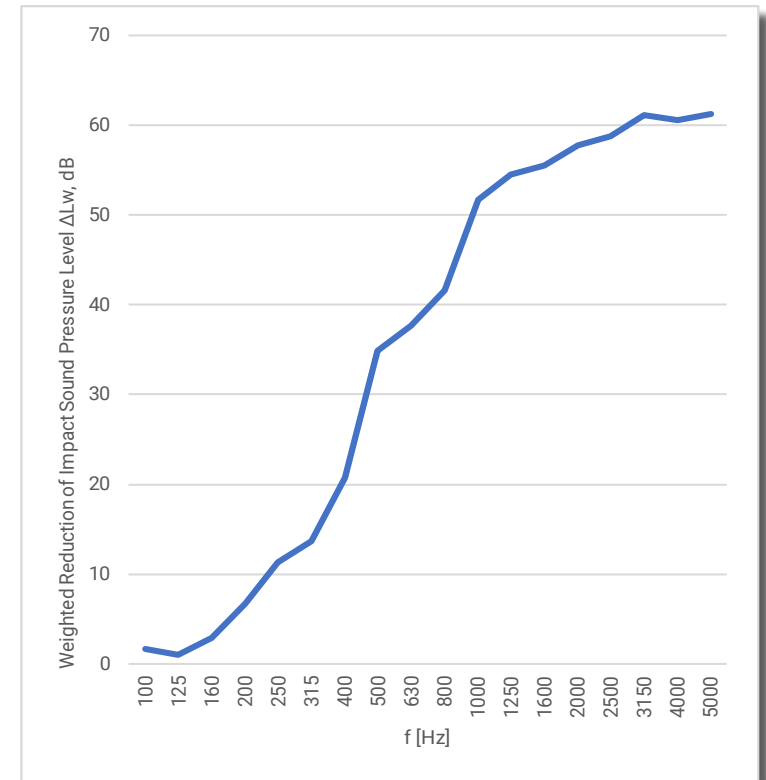

Rating in accordance to ISO 717-2