



Soft Note™

Product Data
Performance Data
Fabric Selection


Soft Note™ Product Data

Description: Soft Note™ is our simply elegant sound absorption option that offers direct acoustic panelling for the treatment of excessive reverberation issues. Available in thicknesses 25mm or 50mm. This product can be wrapped in a range of fabrics or laminated with a white felt as a final finish (this is called Soft Note™ Pro).

Dimensions: 2440mm x 1220mm x 25 or 50mm


Mass: 25mm - 1.95 kg/m²
50mm - 3.9 kg/m²

Features and benefits: Stock sizes provided
Suitable for areas consisting of high reverberation times
Minimum Noise Reduction Coefficient of 1.0, an average of 100% across the frequency range
Lightweight and easy to install
Not affected by moisture, mould or mildew
Durable and long lasting
Can be wrapped in a range of fabrics
Soft Note Pro can be used as a final finish (only in white)

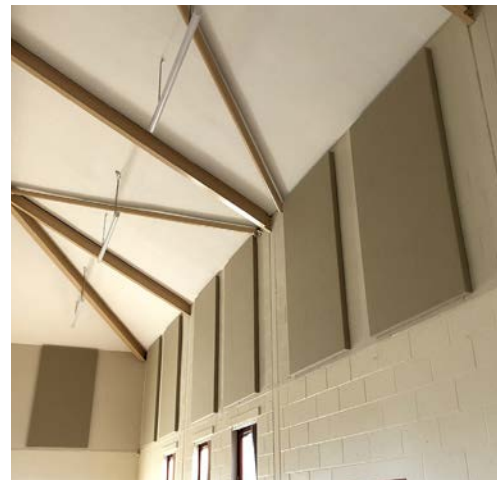

Soft Note™ Performance Data

Acoustic Test Report Soft Note 50 mm

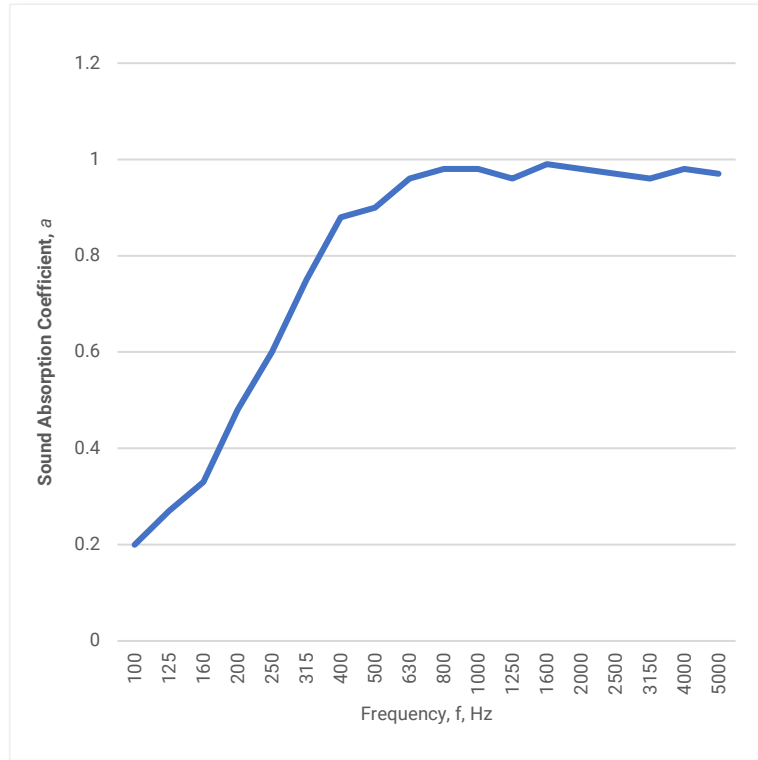

Freq	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	NRC
Soft Note	0.20	0.27	0.33	0.48	0.60	0.75	0.88	0.90	0.96	0.98	0.98	0.96	0.99	0.98	0.97	0.96	0.98	0.97	0.90

Soft Note™ Fabric Selection

Camira - Lucia



Soft Note™ Fabric Selection

Camira - Cara

